



SDP-1 SOUND DEFLECTOR PANEL

The SDP-1 Panel uniquely combines advanced acoustic technology and superior performance.

SDP-1 SOUND DEFLECTOR PANEL

It features paired with a sound-absorbent substrate, achieving excellent sound absorption across NRC frequency bands while preserving the space's "air" by tapering off absorption at 1000Hz. This panel consistently absorbs sound in the 1000-4000Hz range, maintaining a balanced Noise Reduction Coefficient (NRC) greater than 0.90.


This innovative technology prevents excessive high-frequency absorption, transitions to a scattering surface at very high frequencies, and significantly enhances mid and low-frequency absorption. Installation is simple and quick using our custom-made cleats system, allowing it to be easily mounted on any wall surface. The SDP-1 Panel

provides a cost-effective, broad bandwidth, and highly efficient solution for reverberation control.

It is available in dimensions of 2'0" (width) x 4'0" (length) x 9-1/2" (thickness). Choose from industry-standard or custom fabrics to meet your specific requirements.

All components are Class A Fire Rated, ensuring safety and compliance.

Performance coefficient

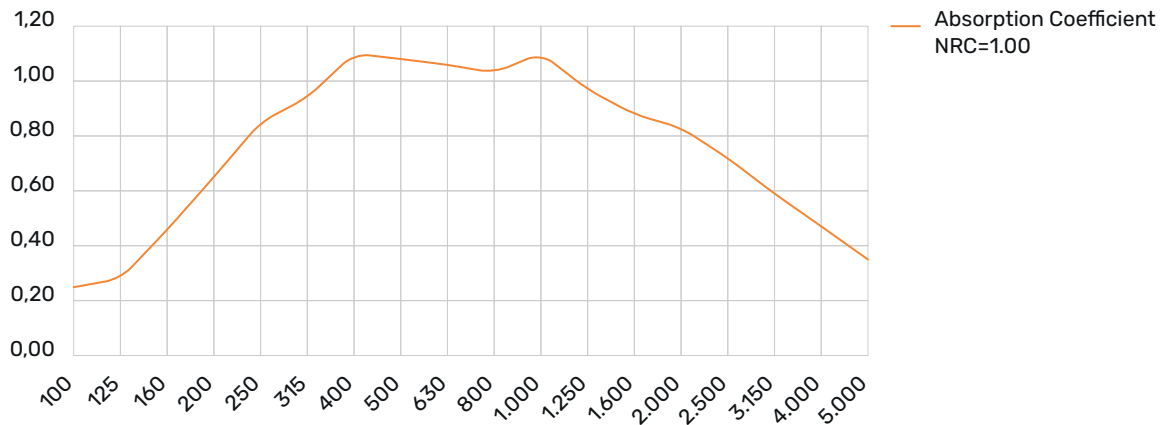

Frequency (Hz)	Absorption Coefficient NRC=1.00
100	0,25
125	0,28
160	0,46
200	0,65
250	0,85
315	0,94
400	1,10
500	1,08
630	1,06
800	1,03
1.000	1,10
1.250	0,97
1.600	0,88
2.000	0,83
2.500	0,72
3.150	0,59
4.000	0,47
5.000	0,35